


OVERVIEW



1. Power button	9. Line-out (3.5mm)
2. Optical drive *	10. HDMI
3. Card reader *	11. 2x DisplayPort
4. Microphone (3.5mm)	12. Serial
5. Headphone / microphone combo jack (3.5mm)	13. Ethernet (RJ-45)
6. USB-C 3.2 Gen 1	14. 4x USB 2.0
7. 2x USB 3.2 Gen 1	15. 2x PS/2 ports (keyboard / mouse) *
8. 2x USB 3.2 Gen 2	16. Serial *

- Notes:
- Items with \* are only available on selected models
  - More ports are available through the optional expansion cards (not shown on the sample product above)

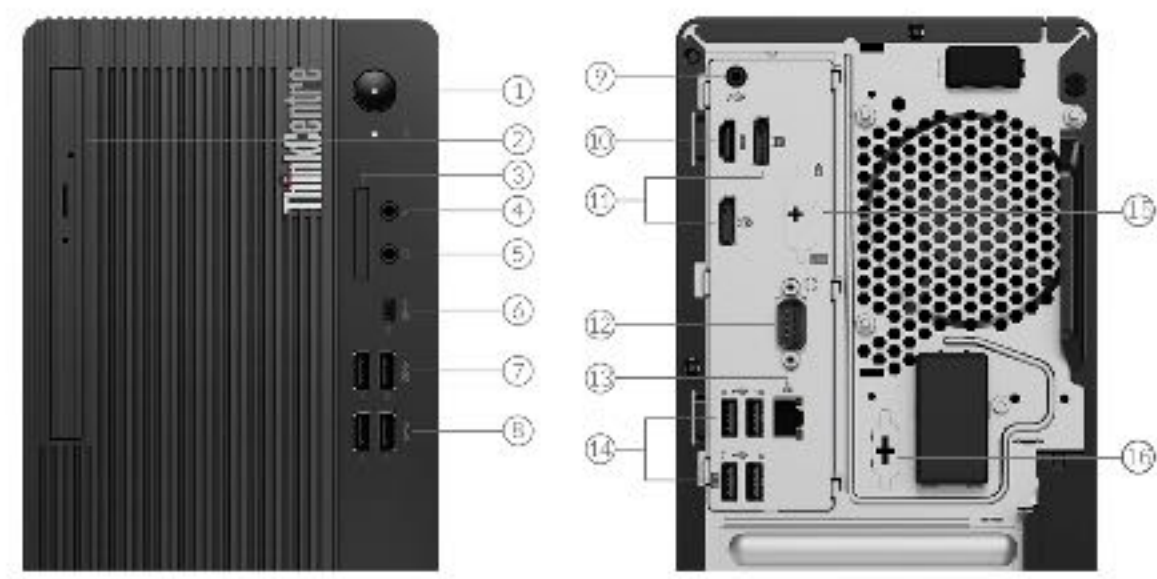

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel Pentium®, or 10th Generation Intel Core™ i3 / i5 / i7 / i9 Processor

Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G5900	2	2	3.4GHz	-	2MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5905	2	2	3.5GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5920	2	2	3.5GHz	-	2MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5925	2	2	3.6GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6400	2	4	4.0GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6500	2	4	4.1GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Pentium Gold G6600	2	4	4.2GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10100	4	8	3.6GHz	4.3GHz <sup>[1]</sup>	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10300	4	8	3.7GHz	4.4GHz <sup>[2]</sup>	8MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10320	4	8	3.8GHz	4.6GHz <sup>[3]</sup>	8MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400	6	12	2.9GHz	4.3GHz <sup>[4]</sup>	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400F	6	12	2.9GHz	4.3GHz <sup>[5]</sup>	12MB	DDR4-2666	-
Core i5-10500	6	12	3.1GHz	4.5GHz <sup>[6]</sup>	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10600	6	12	3.3GHz	4.8GHz <sup>[7]</sup>	12MB	DDR4-2666	Intel UHD Graphics 630
Core i7-10700	8	16	2.9GHz	4.8GHz <sup>[8]</sup>	16MB	DDR4-2933	Intel UHD Graphics 630
Core i7-10700F	8	16	2.9GHz	4.8GHz <sup>[9]</sup>	16MB	DDR4-2933	-
Core i9-10900	10	20	2.8GHz	5.2GHz <sup>[10]</sup>	20MB	DDR4-2933	Intel UHD Graphics 630
Core i9-10900F	10	20	2.8GHz	5.2GHz <sup>[11]</sup>	20MB	DDR4-2933	-

Notes:

[1], [2], [3], [4], [5], [6], [7], [8], [9], [10], [11] Intel Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see <http://www.intel.com/technology/turboboost/> for more information.

Operating System

Operating System\*\*

- Ubuntu Linux<sup>[1]</sup>
- Windows® 10 Home 64
- Windows 10 Home 64 Single Language
- Windows 10 IoT Enterprise
- Windows 10 Pro 64
- Windows 11 DG Windows 10 Pro 64
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 Pro
- No operating system

Notes:

[1] Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, Human Presence Detection, etc.

Graphics

Graphics\*\*<sup>[1]</sup>

Graphics	Type	Memory	Connector	Max Resolution	Key
----------	------	--------	-----------	----------------	-----

					Features
Intel UHD graphics 610	Integrated	Shared	1x HDMI®, 2x DP	1920x1080@60Hz(HDMI), 4096x2304@60Hz(DP)	DirectX® 12
Intel UHD graphics 630	Integrated	Shared	1x HDMI, 2x DP	1920x1080@60Hz(HDMI), 4096x2304@60Hz(DP)	DirectX 12
AMD Radeon™ 520	Discrete	2GB GDDR5	2x DP 1.2	4096x2160@60Hz(DP)	DirectX 12
NVIDIA® GeForce GT 730	Discrete	2GB GDDR5	1x VGA, 1x HDMI 1.4	2048x1536@75Hz(VGA), 3840x2160@30Hz(HDMI)	DirectX 12
AMD Radeon RX 550X	Discrete	4GB GDDR5	1x HDMI 2.0, 1x VGA, 1x DP 1.4	4096x2160@60Hz(HDMI), 2048x1536@85Hz(VGA), 3840x2160@60Hz(DP)	DirectX 12

Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

Monitor Support

Monitor Support<sup>[1]</sup>

Supports up to 3 independent displays via onboard ports (HDMI and 2x DisplayPort™), more displays support via discrete graphics

Notes:

[1] Onboard video ports are only available for the models with integrated graphics.

Chipset

Chipset

Intel H470 chipset

Memory

Max Memory<sup>[1]</sup>

Up to 128GB DDR4-2933

Memory Slots

Four DDR4 DIMM slots, dual-channel capable

Memory Type<sup>\*\*</sup>

- DDR4-2666
- DDR4-2933

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Storage Support<sup>[1]</sup>

Up to three drives, 1x 2.5"/3.5" HDD + 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB each
- 3.5" HDD up to 2TB
- M.2 SSD up to 2TB
- Optional Intel Optane™ Memory, M.2

Storage Type<sup>\*\*\*</sup>

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe® NVMe®, PCIe 3.0 x2	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal

Intel Optane Memory M10	PCIe NVMe, PCIe 3.0 x2	-	-
-------------------------	------------------------	---	---

RAID

No support

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo storage offerings.

Removable Storage

Optical\*\*

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- None

Card Reader

- 3-in-1 card reader (SD, SDHC, SDXC)
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC623-CG codec

Speakers

Single speaker, 2W x1

Power Supply

Power Supply\*\*

Power	Type	Efficiency	Key Features
180W	Fixed	85%	-
260W	Fixed	85%	100-240V, 50-60Hz
310W	Fixed	92%	100-240V, 50-60Hz
380W	Fixed	92%	-

DESIGN

Input Device

Keyboard\*\*

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

Mouse\*\*

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black (EOL on Jan, 2023)
- No mouse

Mechanical

Form Factor

Tower (13.6L)

Dimensions (WxDxH)<sup>[1]</sup>

145 x 296 x 346 mm (5.7 x 11.7 x 13.6 inches)

Packaging Dimensions (WxDxH)

245 x 395 x 530 mm (9.65 x 15.55 x 20.87 inches)

Weight<sup>[2]</sup>

Around 4.8 kg (10.6 lbs)

**Packaging Weight**

All models: 8.3 kg (18.29 lbs)

**Case Color**

Black

**Bays**

- 1x 2.5" disk bay (optional, or bay comes with disk)
- 1x 3.5" disk bay
- 1x slim ODD bay

**Expansion Slots**

- One PCIe 3.0 x16, full-height (length < 215mm)
- One PCIe 3.0 x1, full-height (length < 215mm)
- Two M.2 slots (one for WLAN, one for SSD)

**Others**

- (Optional) Dust filter
- Supports Smart Power On

---

**Notes:**

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

**Onboard Ethernet**

Gigabit Ethernet, Intel Ethernet Connection I219-V, 1x RJ-45, supports Wake-on-LAN

**Optional Ethernet\*\***

- Gigabit Ethernet, Bitland BN8E88, 1x RJ-45, PCIe x1
- Gigabit Ethernet, Intel Ethernet Server Adapter I350-T4, 4x RJ-45, PCIe x4<sup>[1]</sup>
- No optional Ethernet

**WLAN + Bluetooth®\*\***

- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth 5.0, M.2 card
- Intel Wireless-AC 9462, 802.11ac Dual Band 1x1 Wi-Fi + Bluetooth 5.0, M.2 card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 card
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card<sup>[2]</sup>
- No WLAN and Bluetooth

---

**Notes:**

[1] Intel Ethernet Server Adapter I350-T4 is not available in EMEA.

[2] Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

### Ports<sup>[1]</sup>

**Front Ports**

- 1x USB-C® 3.2 Gen 1
- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

**Optional Front Ports**

- 1x card reader
- None

**Rear Ports<sup>[2]</sup>**

- 4x USB 2.0
- 1x HDMI
- 2x DisplayPort

- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)
- 1x serial (9-pin)

**Optional Rear Ports\*\*\***

- 2x USB-C 3.2 Gen 2 (support data transfer, via 2-port USB-C expansion card, PCIe x4)
- 2x USB 3.2 Gen 1 (via 2-port USB expansion card, PCIe x1)
- 1x parallel
- 1x serial
- 4x serial (via 4-port serial expansion card, PCIe x1)
- 2x PS/2

**Notes:**

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

[2] For video ports on discrete graphics, please see graphics section.

**Monitor Cable****Monitor Cable\*\*\***

- HDMI to HDMI cable
- HDMI to VGA dongle
- DP to VGA dongle
- DP to VGA cable (1.5M)
- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI dongle
- No monitor cable

**SECURITY & PRIVACY****Security****Security Chip**

Discrete TPM 2.0, TCG certified

**Physical Locks**

- (Optional) E-lock
- (Optional) Smart Cable Clip
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

**Chassis Intrusion Switch**

- Chassis intrusion switch
- No chassis intrusion switch

**Fingerprint Reader**

- Touch style fingerprint reader on mouse (EOL on Jan, 2023)
- No fingerprint reader

**BIOS Security**

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

**MANAGEABILITY**

## System Management

### System Management

Non-vPro®

## SERVICE

### Warranty<sup>[1]</sup>

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

## ENVIRONMENTAL

### Operating Environment

#### Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

#### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications

- ENERGY STAR® 8.0 (only available for MT 11D9/11DA)
- EPEAT™ Gold Registered
- EPEAT Silver Registered
- ErP Lot 3
- RoHS compliant
- TCO Certified 8.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

### Other Certifications

#### Other Certifications

- (Optional) TÜV Rheinland® Low Noise
- (Optional) TÜV Rheinland Ultra Low Noise

• Feature with \*\* means that only one offering listed under the feature is configured on selected models.

• ThinkCentre M70t\*\* September 25, 2023  
• Feature with \* means that one or more offerings listed under the feature could be configured on selected

models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



