


OVERVIEW

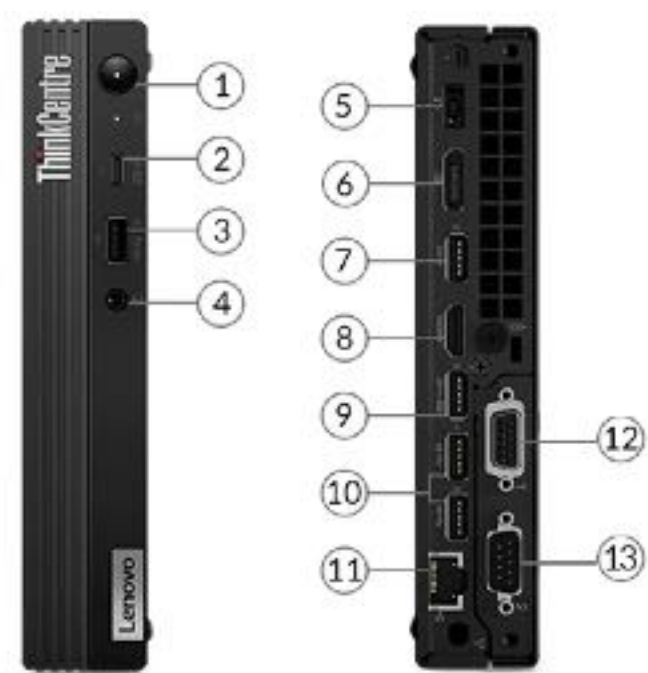

1. Power button	8. HDMI
2. USB-C 3.2 Gen 1	9. USB 3.2 Gen 1
3. USB 3.2 Gen 2	10. 2x USB 3.2 Gen 2
4. Headphone / microphone combo jack (3.5mm)	11. Ethernet (RJ-45)
5. Power connector	12. Optional port 1 (VGA is shown) *
6. DisplayPort	13. Optional port 2 (serial is shown) *
7. USB 3.2 Gen 1	

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel Pentium®, or 10th Generation Intel Core™ i3 / i5 / i7 / i9 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G5900	2	2	3.4GHz	-	2MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5905T	2	2	3.3GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5920	2	2	3.5GHz	-	2MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5925	2	2	3.6GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5905	2	2	3.5GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5900T	2	2	3.2GHz	-	2MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6500	2	4	4.1GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Pentium Gold G6500T	2	4	3.5GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Pentium Gold G6400T	2	4	3.4GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6400	2	4	4.0GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6600	2	4	4.2GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10100	4	8	3.6GHz	4.3GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10100T	4	8	3.0GHz	3.8GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10300	4	8	3.7GHz	4.4GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10300T	4	8	3.0GHz	3.9GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10320	4	8	3.8GHz	4.6GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400	6	12	2.9GHz	4.3GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400T	6	12	2.0GHz	3.6GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10500	6	12	3.1GHz	4.5GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10500T	6	12	2.3GHz	3.8GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10600	6	12	3.3GHz	4.8GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10600T	6	12	2.4GHz	4.0GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i7-10700	8	16	2.9GHz	4.8GHz	16MB	DDR4-2933	Intel UHD Graphics 630
Core i7-10700T	8	16	2.0GHz	4.5GHz	16MB	DDR4-2933	Intel UHD Graphics 630
Core i9-10900	10	20	2.8GHz	5.2GHz	20MB	DDR4-2933	Intel UHD Graphics 630



Core i9-10900T	10	20	1.9GHz	4.6GHz	20MB	DDR4-2933	Intel UHD Graphics 630
----------------	----	----	--------	--------	------	-----------	------------------------

Operating System

Operating System**

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Windows 10 Home 64 Single Language
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

Graphics

Graphics**[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 610	Integrated	Shared	1x HDMI®, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C® / dual DP)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 3840x2160@60Hz(Dual DP, MST mode), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX® 12
Intel UHD graphics 630	Integrated	Shared	1x HDMI, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C / dual DP)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 3840x2160@60Hz(Dual DP, MST mode), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX 12

Notes:

1. The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section)

Monitor Support

Monitor Support

Supports up to 3 independent displays via (onboard DP, onboard HDMI, and one optional port [VGA / 2nd DP / 2nd HDMI / USB-C]) or (one onboard port [DP / HDMI] and optional dual DP [MST mode])

Chipset

Chipset

Intel Q470 chipset

Memory

Max Memory[1]

Up to 64GB DDR4-2933

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type**[2]

- DDR4-2666
- DDR4-2933

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.
2. Installed memory is actually 3200MHz, but may run at 2666MHz or 2933MHz, depending on the memory support capability of processor

Storage

Storage Support^[1]

- Up to three drives, 1x 2.5" HDD + 2x M.2 SSD
- 2.5" HDD up to 1TB
 - M.2 SSD up to 2TB each
 - Optional Intel Optane™ Memory, M.2

Storage Type***

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe® NVMe®, PCIe 3.0 x2	-	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal
Intel Optane Memory M10	PCIe NVMe, PCIe 3.0 x2	-	-

RAID

RAID 0/1 support for M.2 SSDs (RAID preset only available via special bid models)

Notes:

1. The max capacity of each disk type is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Removable Storage

Optical**

- DVD-ROM, slim (9.0mm), via USB external ODD box
- DVD burner (DVD±RW), slim (9.0mm), via USB external ODD box
- None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC233VB codec

Speakers

Single speaker, 1.5W x1

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
90W	Adapter	89%	Autosensing
135W	Adapter	89%	Autosensing
230W	Adapter	89%	Autosensing
No power supply	-	-	-

DESIGN

Input Device

Keyboard**

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

Mouse**

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)^[1]

Models	Dimensions
Tiny only	179 x 183 x 34.5 / 37 mm with rubber feet (7.05 x 7.2 x 1.36 / 1.5 inches with rubber feet)
With VESA mount & ODD box	187 x 183.8 x 66.5 mm (7.36 x 7.24 x 2.62 inches)

Weight^[2]

Models	Weight
Tiny only	1.25 kg (2.76 lbs)
With VESA mount & ODD box	1.74 kg (3.84 lbs)

Case Color

Black

Bays

1x 2.5" disk bay

Expansion Slots^[3]

- One PCIe 3.0 x8, low-profile
- Three M.2 slots (one for WLAN, two for SSD)

EOU

(Optional) toolless chassis open (toolless chassis screw required) and toolless M.2 SSD, HDD, memory assembly / removal

Stand

- Vertical stand
- No stand

Mounting

- VESA mount bracket kit, supports VESA mount 75mm and 100mm
- None

Others

- (Optional) Dust filter
- (Optional) Power adapter cage

Notes:

- 1 . The system dimensions may vary depending on configurations.
- 2 . The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.
- 3 . PCIe 3.0 x8 slot is for Lenovo qualified PCIe cards, Intel I350-T4 ethernet card and 4x serial port expansion card. The PCIe card occupies the space of 2.5" HDD/SSD and optional ports, they are mutually exclusive.

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

- Gigabit Ethernet, Intel Ethernet Server Adapter I350-T4, 4x RJ-45, PCIe x4^[4]
- No optional Ethernet

WLAN + Bluetooth®[2]**

- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth 5.0, M.2 card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 card
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, Intel vPro® technology support, M.2 Card
- No WLAN and Bluetooth

Notes:

1. Intel Ethernet Server Adapter I350-T4 is not available in EMEA
2. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

Ports^[1]**Front Ports**

- 1x USB 3.2 Gen 2 (Always On and fast charge)
- 1x USB-C 3.2 Gen 1
- 1x headphone / microphone combo jack (3.5mm)

Optional Front Ports

None

Rear Ports^[2]

- 1x HDMI
- 1x DisplayPort™
- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x Ethernet (RJ-45)

Optional Rear Ports***

- Optional port 1 (one of VGA / 2nd DisplayPort / 2nd HDMI / serial / USB-C 3.2 Gen 1 with DisplayPort function)
- 2x USB 3.2 Gen 1 ports (share one USB 3.2 Gen 1 bandwidth, occupy optional port 1 and 2)
- 4x USB 3.2 Gen 1 (share one USB 3.2 Gen 1 bandwidth, occupy port 1 and 2)
- 2x DisplayPort ports (occupy Optional port 1 and 2)
- Optional port 2 (serial)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed. USB 2.0: 480 Mbit/s; USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s; USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s; USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s; USB4 40Gbps (USB 40Gbps): 40 Gbit/s; Thunderbolt™ 3/4: 40 Gbit/s
2. For video ports on discrete graphics, please see graphics section

Monitor Cable**Monitor Cable*****

- HDMI to HDMI cable (1.5m)
- HDMI to VGA dongle
- DP to VGA dongle
- DP to VGA cable (1.5M)
- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI dongle
- No monitor cable

SECURITY & PRIVACY**Security****Security Chip**

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

Chassis intrusion switch

Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Self-healing BIOS
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

System Management^{[1][2]}

- Intel vPro with Intel AMT 14
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.
2. Require choosing a vPro-support Wi-Fi adapter to enable vPro function through wireless connection

SERVICE

Warranty^[1]

Base Warranty^{**}

- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) EPEAT™ Gold Registered
- (Optional) EPEAT Silver Registered
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 8.0
- RoHS compliant

Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

Other Certifications

Other Certifications

- (Optional) TÜV Rheinland® Low Noise
- (Optional) TÜV Rheinland Ultra Low Noise

Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

